


ALVEPLAC®

GRAVEL STABILIZATION MAT
FOR LANDSCAPING AREA



Jouplast®



www.jouplast.com



- DESCRIPTION -

› Honeycomb mat for gravel stabilization with geotextile membrane and integrated assembly system.


- USE -

- › Provides a stable platform for gardens, paths and pedestrian areas.
- › Perfect for private parking, driveways and gravel access roads.
- › Perfect for public, community, commercial, industrial use and for emergency vehicle access.
- › Offers an aesthetic finish [product invisible at the end of the site].

- PRODUCT FEATURES -

- › Retains gravel.
- › Ensures rapid drainage of rainwater.
- › Geotextile membrane included (60g/m²) and permanently bonded to the cells.
- › Eliminates ruts and puddles.
- › Can be used for the passage of vehicles with an axle load of 20 T and access for firefighters.
- › Easy handling : light product.
- › Can be installed on slopes up to 15% for pedestrian areas and 10% for driving areas.
- › Alveplac®, Delima® and Greenplac® can be mixed and used in combination for a comprehensive solution.


TECHNICAL DETAILS

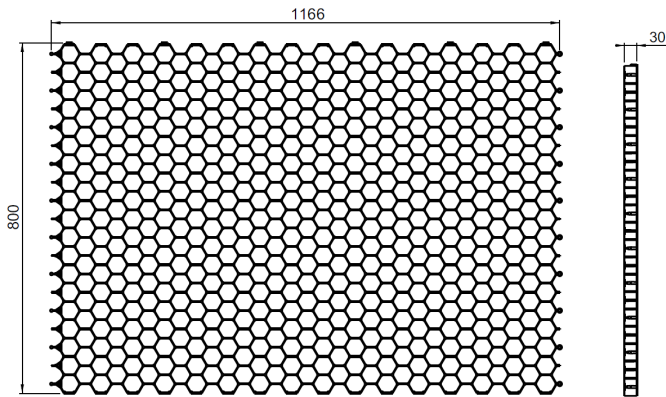


- › Material : recycled polypropylene
- › Colour : grey *(the colour may vary according to the raw material supplied)*
- › Overall dimensions : 1166 mm x 800 mm x 30 mm *
- › Usable dimensions : 1150 mm x 790 mm x 30 mm *
- › Usable area : 0.91 m²
- › Weight : 1.7 kg ie 1.87 kg/m²
- › Cell structure : Hexagonal (honeycomb) / Diameter : 42 mm
- › Membrane : Geotextile 60g/m² - permanently bonded to the cells.
- › Volume/gravel weight per sqm² : 40 liters - 60 kg
- › Resistance (empty) : 200 T/m²
- › Resistance (filled) : 650T/m² *(Test OLP 01183426-P3)*
- › Resistance to temperature -30°C to +60°C
- › UV and FROST resistant

* Manufacturing tolerance : +/- 2%


USE WITH GREENPLAC® & DELIMA®

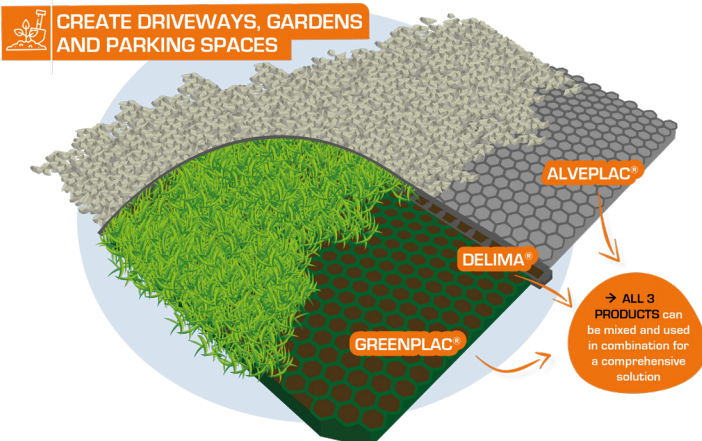

Document protected by copyright. Any reproduction, copy, extraction, reuse in others publications, translation or adaptation, display, distribution or modification, in whole or in part, without the written consent of TMP CONVERT is strictly prohibited and will be sanctioned. TMP CONVERT reserves the right to add, modify or delete information to any time without warning.

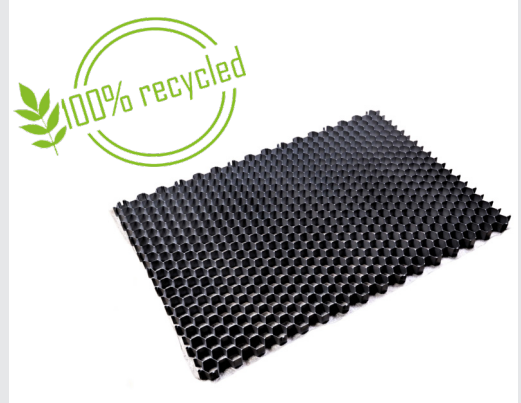

FIXATION

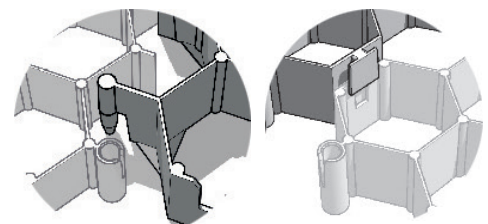

Integrated assembling system

PACKING

Pallet of 38 parts (stackable)

RECOMMENDATIONS

- › You need to fill the ALVEPLAC® cells with gravels to guarantee its performance. Also, lay 1-2 cm of additional gravel on the filled mat.
- › Fill the cells with 5/15 or 8/16 gravels.
- › For heavy traffic in urban area, it is recommended to use our reference Urbangravel®.

